

Korniche FlatLite™ surveying guide

Upstand position cross section

When specifying the dimensions of your FlatLite, you should provide the external dimensions of your upstand and the fitted waterproof membrane

3 to 5° degree pitch

Upstand width 75 - 85mm

Upstand min 150mm

To ensure the upstand is square **a** & **b** should be equal with a tolerance of +/-4


*Maximum area is limited to 3m²

A: Trim - ceramic coating 120mm

B: Plasterboard

C: Indicative structure (by others)

D: Waterproof membrane

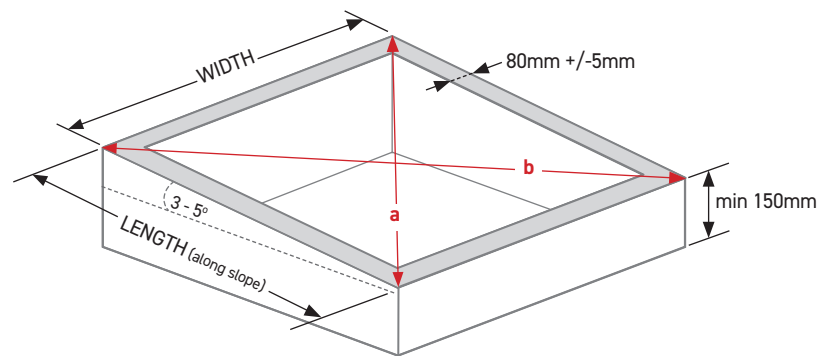

Recommended upstand detail - Available to order with FlatLite on KWIKQUOTE

